




Squirrel Boxes

Watchtower Drey Installation Guide



D1 Camera Box

Exploded View

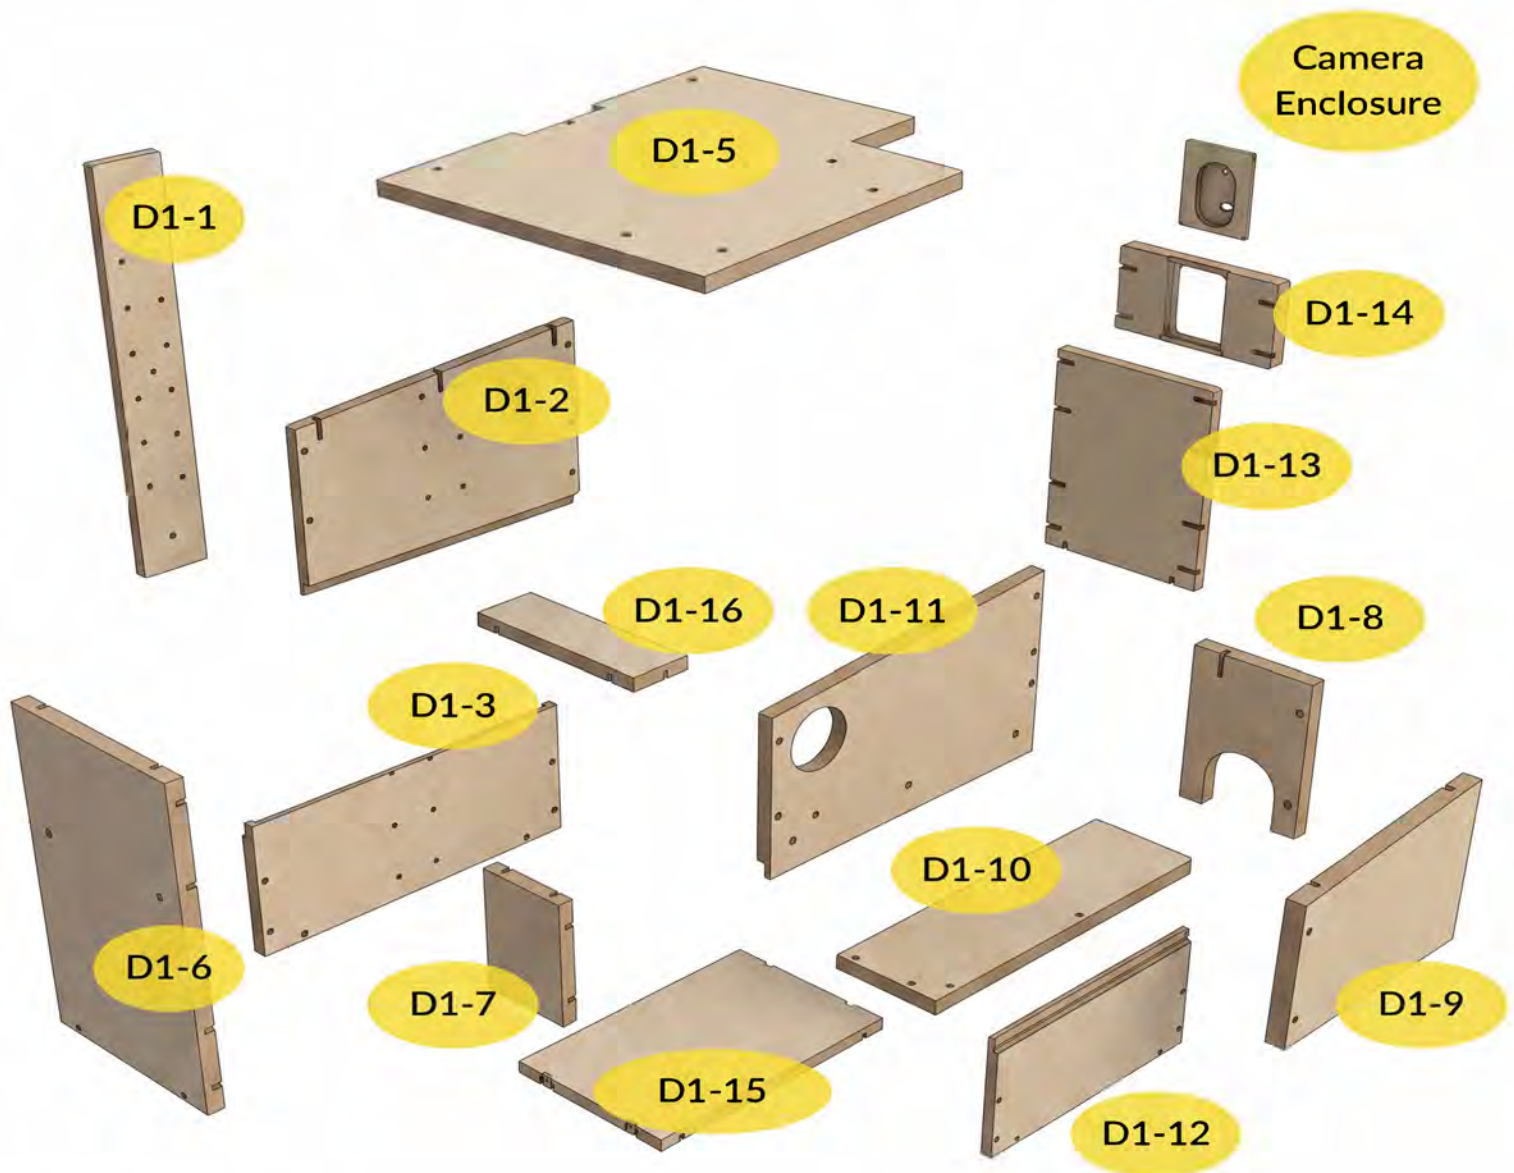

Camera enclosure part numbers:

SB-CAME-BLINK details: blink camera enclosure blink outdoor 2k / blink outdoor 4

SB-CAME-Google-nest-outdoor details: google nest outdoor camera enclosure

SB-CAME-ARLOP6 details: arlo pro 6 outdoor camera enclosure

SB-CAME-ARLOE details: arlo essentials outdoor camera enclosure

SB-CAME-ARLOGO2 details: arlo go2 outdoor camera enclosure



SB-CAME-RINGOP details: ring outdoor plus camera enclosure

Most adjoining pieces do not have pre-drilled holes; insert each screw through the pre-drilled hole and into the corresponding slot to avoid splitting the material.







Installation Guide

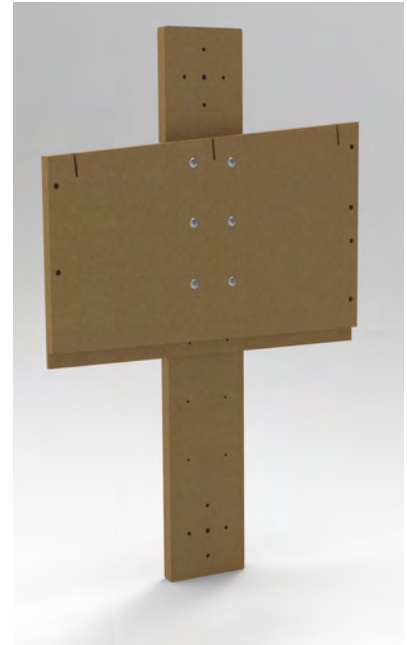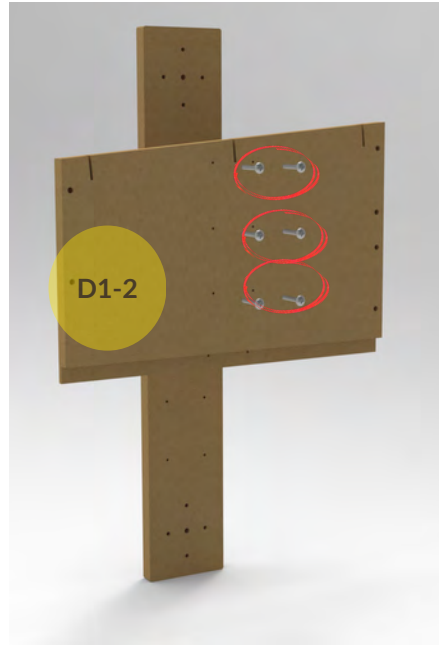

Attach part D1-2 to part D1-1

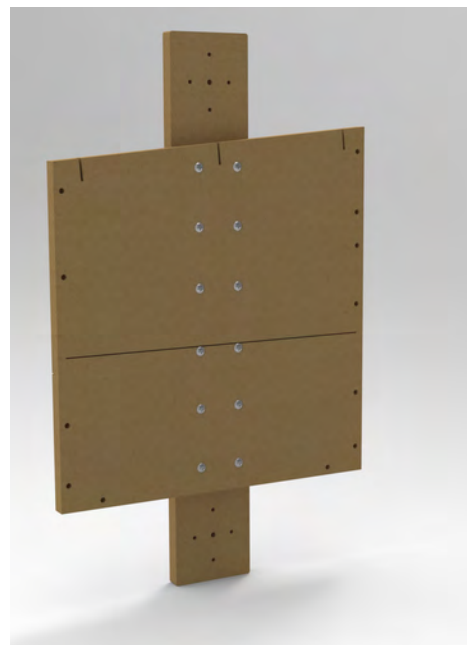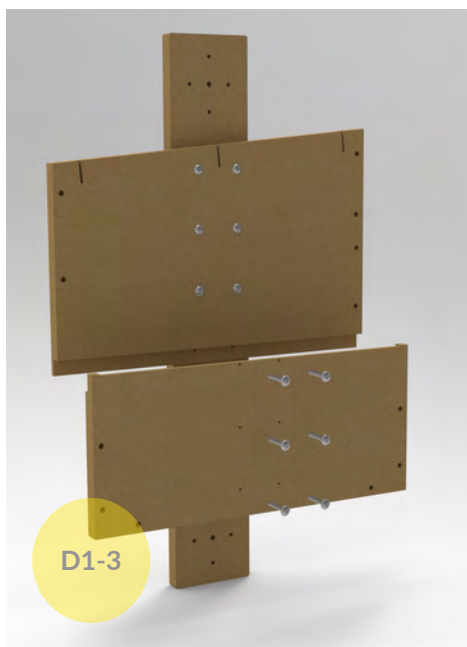


Attach part D1-3 to Assembly






Screw the part D1-16 to D1-6

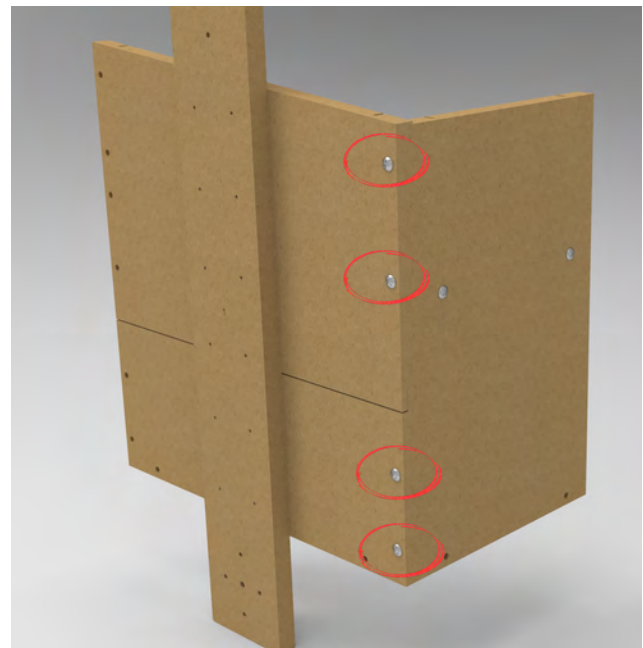


Screw the part D1-6 assembly to main assembly.



Installation Guide

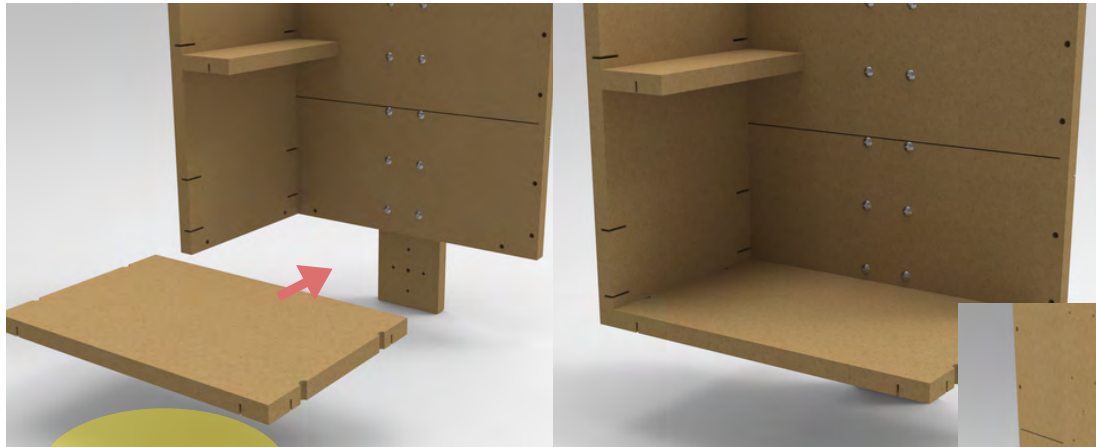

D1-15

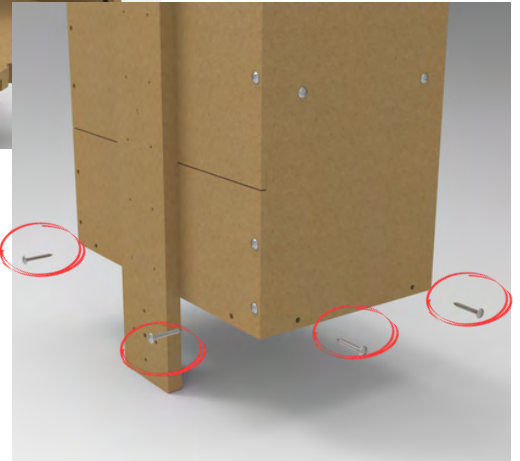

Attach D1-15 to assembly .



D1-13




Screw the D1-13 Assembly to main assembly



Installation Guide




Slide D1-12 into assembly.

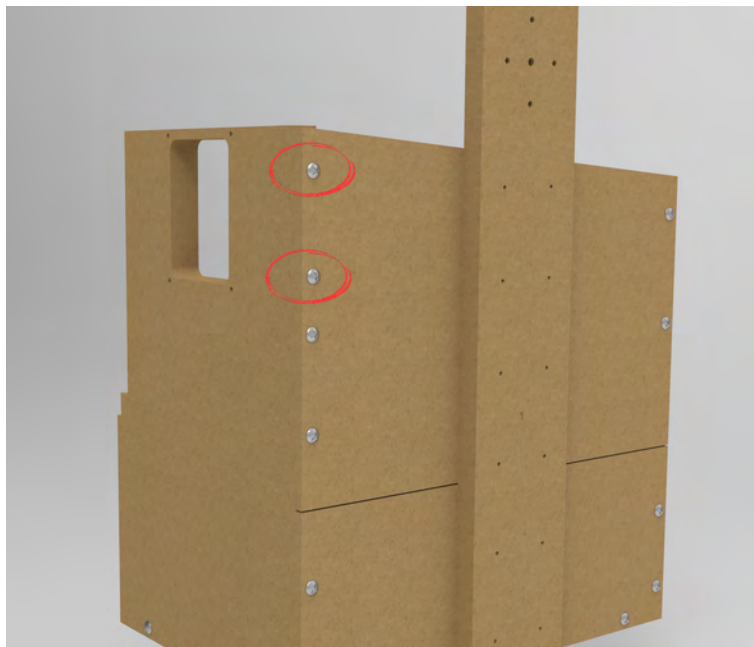


Slide D1-14 into assembly.



Installation Guide

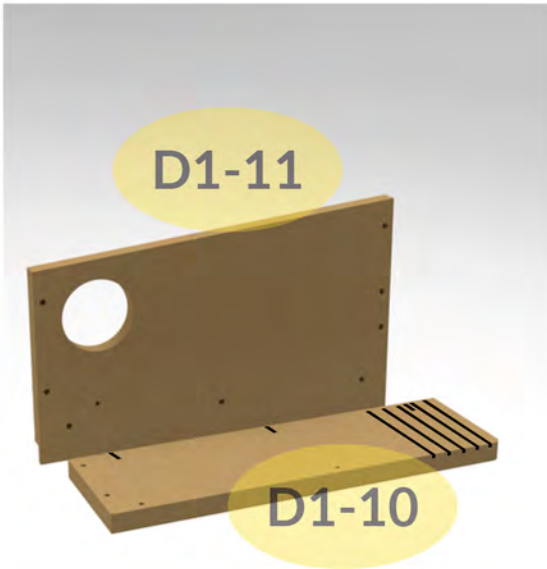


**Attach D1-11 to D1-10.
Grooves Stay Up on D1-10**

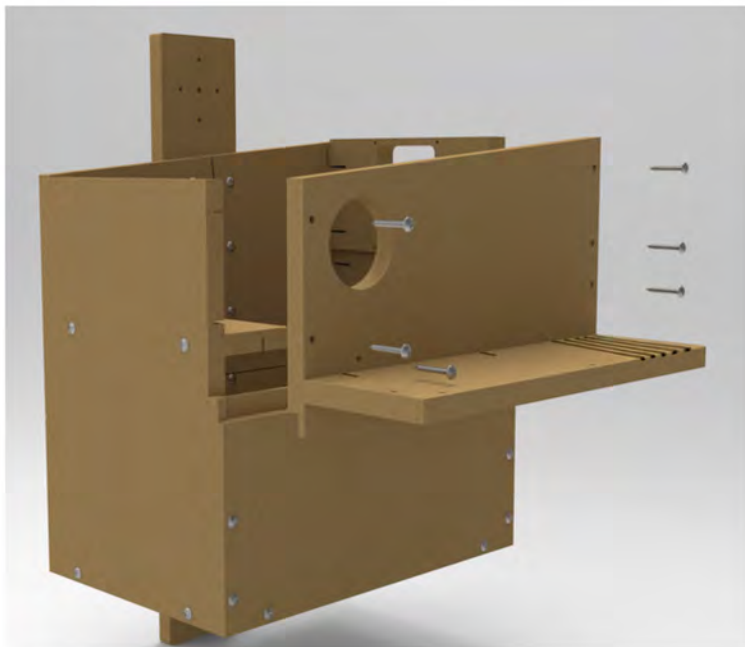


Screw this sub assembly into assembly.


Installation Guide

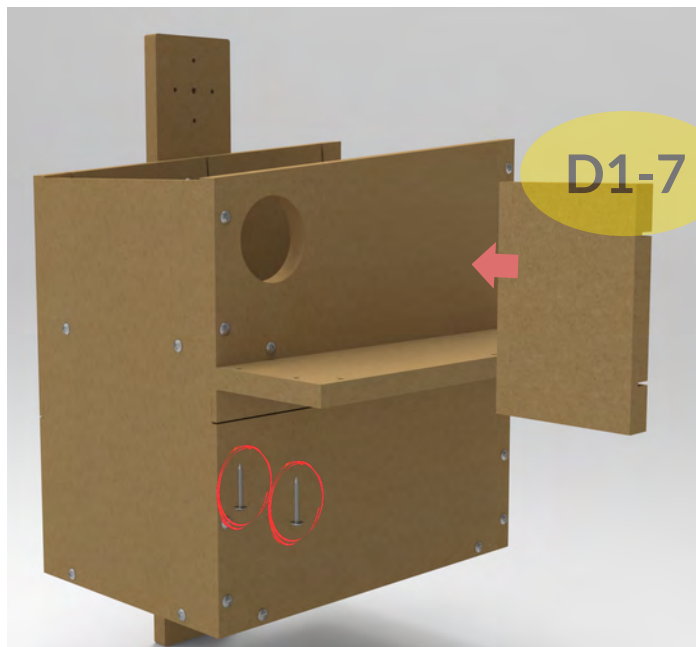



Screw D1-7 into assembly.

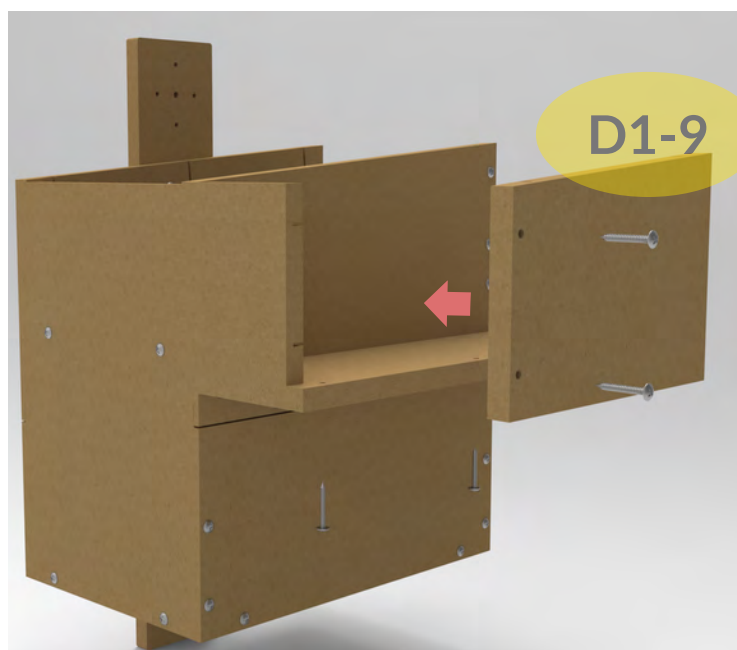


Screw D1-9 into assembly.

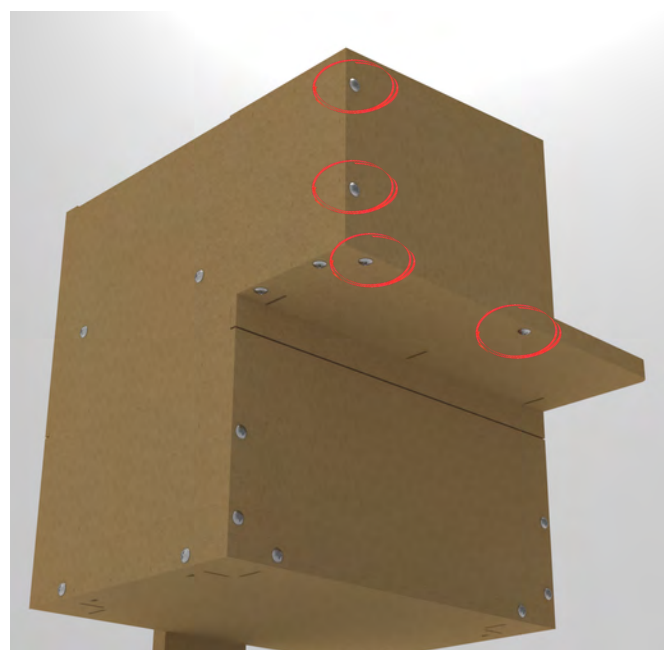

Installation Guide

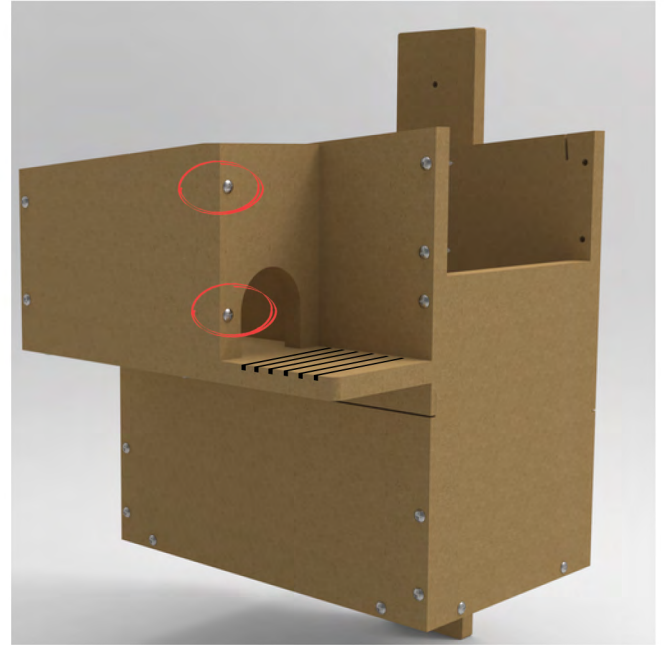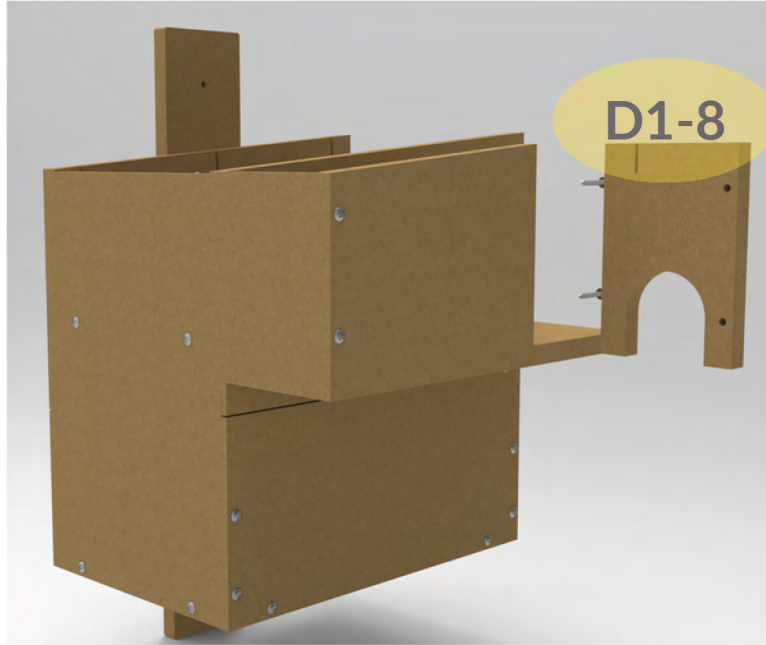



Screw D1-8 to assembly.

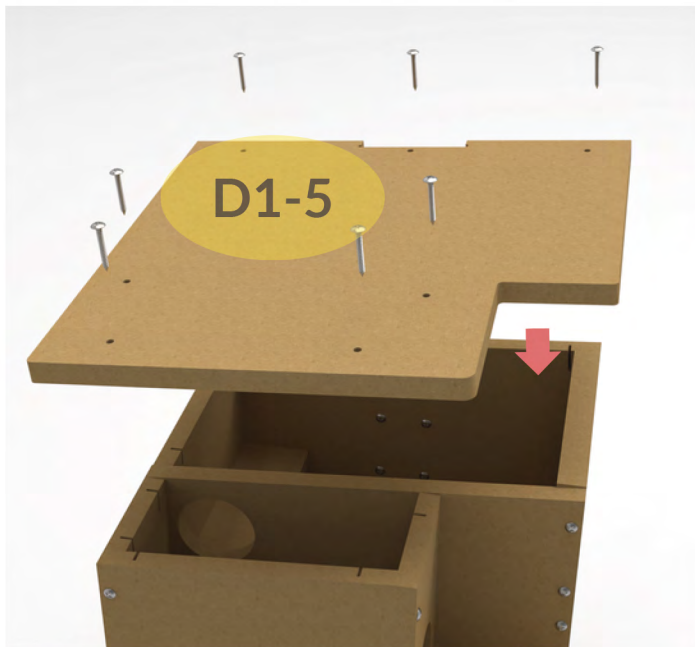

Screw D1-5 into assembly.



Installation Guide

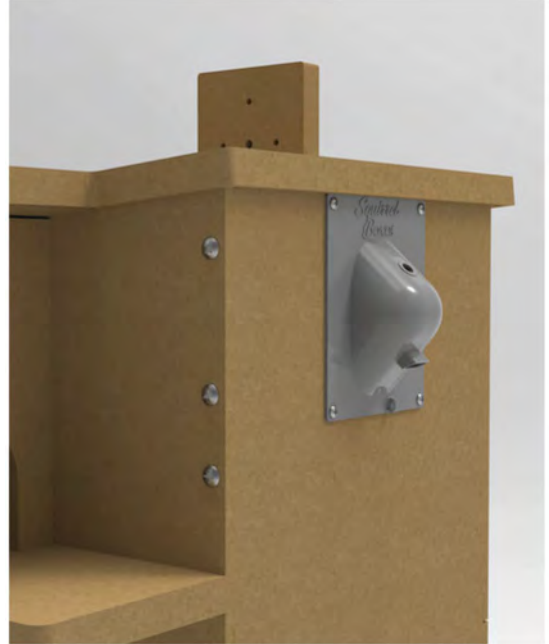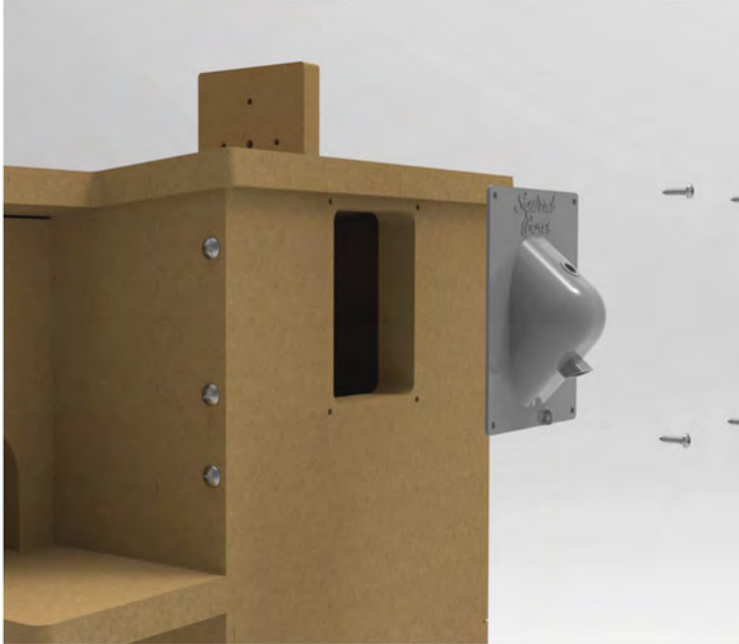

Screw the camera enclosure the box



Camera Installation Guide



Remove the back cover from the Blink Outdoor 4 camera.

Insert the power cable through the 3D-printed bracket.

Plug the power cable into the USB-C port on the Blink camera.

Place the camera into the included bracket with the power cable installed.

Secure the Blink camera to the bracket using the included washer and screw.

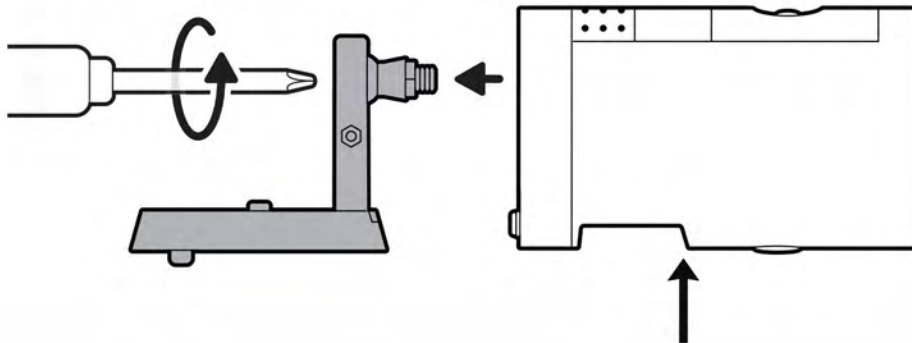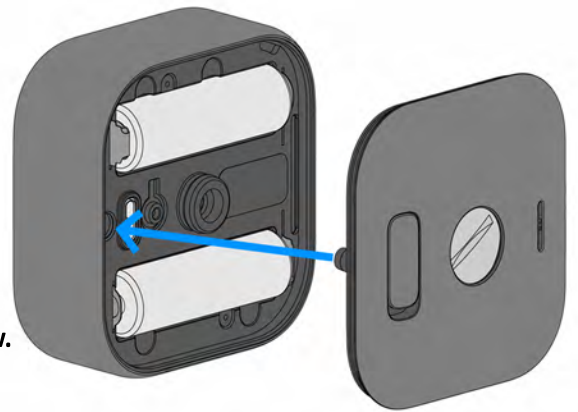

Remove the stand from the Ring camera.

Insert the USB-C power cable into the back of the Ring camera.

Place the Ring camera, with the power cable connected, into the 3D-printed bracket.